



422



202



392



432



102



212




242



162



512



542



182



552



582



192



152



732



662

Hero 2



882



752



742




772




782



862



912



622



932



672



652



352



962




942



312



372

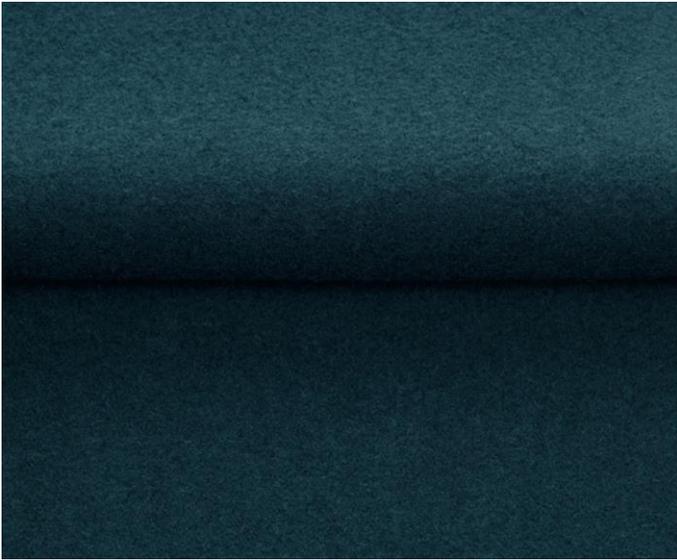

Hero 2

Abrasion

Approx. 45.000 Martindale rubs, EN ISO 12947

Abrasion test results exceeding ACT performance guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention

Pilling

Note 3-4, EN ISO 12945

Seam slippage

Seam parallel to warp: 1.5mm parallel to weft: 2.0 m
EN ISO 13 936-2 180 Newton

Lightfastness

Note 5-6 ISO 105-B02

Fastness to rubbing

Dry note 4-5 ISO 105-X12
Wet note 4-5 ISO 105-X12

Absorption

0.55/Class D (flat), 0.80/Class B (folded) EN ISO 354

Airflow

380 Pa s/m EN 29053

Flame resistance

AS/NZS 3837 class 2
ASTM E84 Class A Unadhered
ASTM E84 Class B Adhered
BS 5852 crib 5 with treatment *
BS 5852 part 1
EN 1021-1/2
EN 13 773 class 1 with treatment *
IMO FTP Code 2010 Part 8
NF D 60 013
SN 198 898 5.3 with treatment *
UNI 9175 1IM
US Cal. Bull. 117-2013

Free from added flame retardant chemicals as standard

** To pass this test flame retardant treatment is necessary. We are looking into more environmentally friendly alternatives but for now, the external finisher may use a treatment containing halogen-based flame retardants*

Hero 2

Design: Patricia Urquiola

Type: Upholstery

Composition: 97% new wool, 3% recycled nylon

Yarn type: Worsted

Binding: Devon weave

Width: Approx. 140 cm, 55 inches

Weight: Approx. 580 g/lin.m, 18.7 oz/ly

Repeat: None

Foreign fibers may occur in light colours

Colour difference may occur

Cleaning: Vacuum clean frequently, ideally every week. Remove stains as soon as they occur, with clean warm water or sparkling water. Please be aware that stain removal will cause a darker area as the wool fibers rise when exposed to water. This can only be reduced by gentle atomizing water over the entire furniture. Extraction clean when necessary. Avoid using steam.

More info: Care and maintenance kvadrat.dk



10 year warranty



kvadrat

ACT Guidelines Woven fabrics

Flammability

US Cal. Bull. 117-2013

Dry & Wet Crocking

Dry Crocking: Grade 4.5-0.5

Wet Crocking: Grade 4.5-0.5

Colour Fastness to Light

Grade 4.0 minimum 40 hours

Physical properties

Pilling Class 3-4

Breaking Strength warp 136 / weft 63 lbs.

Seam Slippage warp 144 / weft 67 lbs.

Abrasion

45.000 cycles Martindale – High Traffic / Public Spaces

Benefits of wool

Wool is a renewable resource

Wool is very comfortable because of its ability to absorb/
give off humidity

Wool is flame retardant

Wool is biodegradable

Wool is naturally soil resistant

Wool ages with grace

Quality benefits

Complies with Möbelfakta

Very good abrasion

Good lightfastness

Flame retardant

Environmental benefits

EU Ecolabel compliant

No content of PFCs or 'PFAS'

REACH compliant

Californian Proposition 65 list compliant

LBC Red list compliant

Healthier Hospital compliant

Green building certificates

Greenguard Gold: Low chemical emission

Health Product Declaration (HPD): Declaring textile content
and substance

Country of origin

United Kingdom

Launch:

2022

Warranty

10 years. See terms and conditions on kvadrat.dk

Kvadrat packaging and cardboard is recyclable. Cardboard
material is FSC certified and / or contains recycled content.

For further information

kvadrat.dk