


Raas

**kvadrat**

Raas

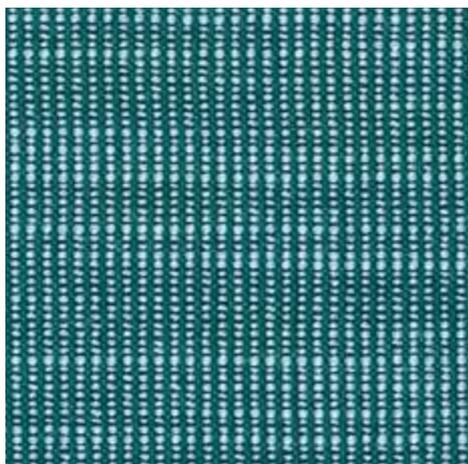


862



982



942



952



442



682




772




782



412



662



672



742




722


Raas




252




242



222




572




122




112




642




562




132



172



462




552



182



192



142



532



# Raas

## Abrasion

Approx. 100.000 Martindale rubs, EN ISO 12947

*Abrasion test results exceeding ACT performance guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention*

## Pilling

Note 4-5, EN ISO 12945

## Seam slippage

Seam parallel to warp: 5.7 mm parallel to weft: 2.2 m  
EN ISO 13 936-2 180 Newton

## Lightfastness

Note 6-7 ISO 105-B02

## Fastness to rubbing

Dry note 4-5 ISO 105-X12  
Wet note 4-5 ISO 105-X12

## Absorption

0.60/Class C (flat), 0.85/Class D (waved) EN ISO 354

## Airflow

2609 Pa s/m EN 29053

## Flame resistance

AS/NZS3837 class 3  
ASTM E84 Class A Unadhered  
ASTM E84 Class B Adhered  
BS 5852 crib 5 with treatment \*  
BS 5852 ignition source 3  
BS 5852 part 1  
EN 1021-1/2  
EN 13501 B-s2, d0 wrapped, with treatment \*  
IMO FTP Code 2010 Part 8  
NF D 60 013  
ÖNORM B2/Q1  
SN 198 898 5.3 with treatment \*  
UNI 9175 1IM  
US Cal. Bull. 117-2013

Free from added flame retardant chemicals as standard

*\* To pass this test flame retardant treatment is necessary. We are looking into more environmentally friendly alternatives but for now, the external finisher may use a treatment containing halogen-based flame retardants*

## Raas

Design: Doshi Levien

Type: Upholstery, panel fabric

Composition: 92% new wool, 8% nylon

Yarn type: Worsted

Binding: Hopsack variant

Width: Approx. 142 cm, 56 inches

Weight: Approx. 765 g/lin.m, 24.7 oz/ly

Repeat: None

Colour difference may occur

Cleaning: Vacuum clean frequently, ideally every week.  
Remove stains as soon as they occur, with clean warm water or sparkling water. Extraction clean when necessary.  
Extraction cleaning might dissolve water-based glue. Pay attention to temperature and amount of cleaning fluid.

Disinfection, see kvadrat.dk

More info: Care and maintenance kvadrat.dk



10 year warranty



# kvadrat

## **ACT Guidelines Woven fabrics**

### **Flammability**

US Cal. Bull. 117-2013

### **Dry & Wet Crocking**

Dry Crocking: Grade 4.5

Wet Crocking: Grade 4.5

### **Colour Fastness to Light**

Grade 4.0 minimum 40 hours

### **Physical properties**

Pilling Class 4-5

Breaking Strength warp 223 / weft 164 lbs.

Seam Slippage warp 142 / weft 325 lbs.

### **Abrasion**

100.000 cycles Martindale – High Traffic / Public Spaces

### **Benefits of wool**

Wool is a renewable resource

Wool is very comfortable because of its ability to absorb/  
give off humidity

Wool is flame retardant

Wool is biodegradable

Wool is naturally soil resistant

Wool ages with grace

### **Quality benefits**

Complies with Möbelfakta

Very good abrasion

Very good lightfastness

Flame retardant

## **Environmental benefits**

EU Ecolabel compliant

Free of intentionally added PFAS

REACH compliant

Californian Proposition 65 list compliant

LBC Red list compliant

Healthier Hospitals compliant

## **Green building certificates**

Greenguard Gold: Low chemical emission

Environmental Product Declaration (EPD): 3rd Party Verified.

ISO 14025 & EN 15804. Developed in accordance with the  
European standard EN 15804+A2.

Health Product Declaration (HPD): Declaring textile content  
and substance

## **Country of origin**

United Kingdom

## **Launch**

2018

## **Warranty**

10 years. See terms and conditions on kvadrat.dk

Kvadrat packaging and cardboard is recyclable. Cardboard  
material is FSC certified and / or contains recycled content.

For further information

kvadrat.dk