

Recheck


**kvadrat**




625




645

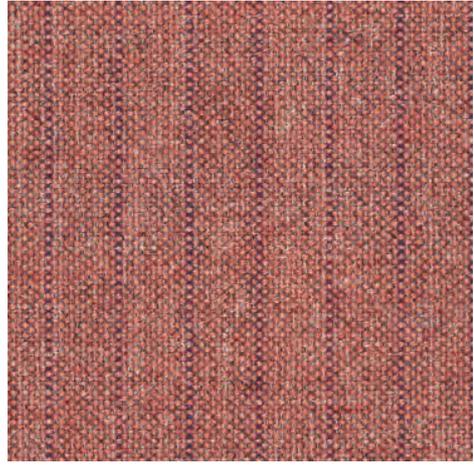

565

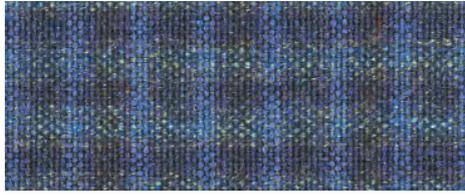


875

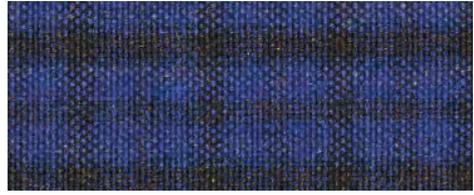


785



965

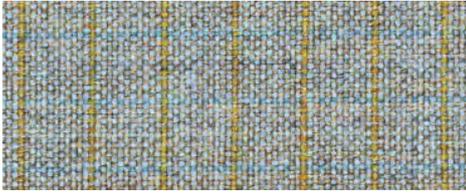

845

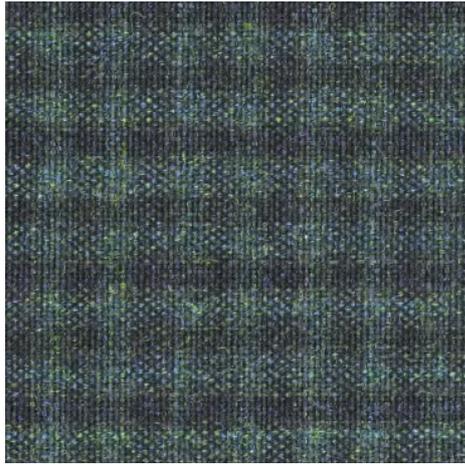


985

Recheck



125

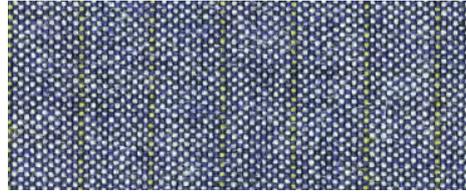

765



455



165



725



115



775



145



745



## Recheck

Design: Giulio Ridolfo

Type: Upholstery

Composition: 90% new wool, 10% nylon

Yarn type: Worsted

Binding: Plain

Width: Approx. 140 cm, 55 inches

Weight: Approx. 420 g/lin.m, 13.6 oz/ly

Repeat: Depending on colour see last page for details

Colour difference may occur

Cleaning: Vacuum clean frequently, ideally every week. Remove stains as soon as they occur, with clean warm water or sparkling water. Extraction clean when necessary. Extraction cleaning might dissolve water-based glue. Pay attention to temperature and amount of cleaning fluid.

Disinfection, see kvadrat.dk

More info: Care and maintenance kvadrat.dk



10 year warranty



## Recheck

### Abrasion

Approx. 100.000 Martindale rubs, EN ISO 12947

*Abrasion test results exceeding ACT performance guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention*

### Pilling

Note 4, EN ISO 12945

### Lightfastness

Note 6-7 ISO 105-B02

### Fastness to rubbing

Dry note 4-5 ISO 105-X12

Wet note 4-5 ISO 105-X12

### Absorption

0.55/Class D (flat), 0.80/Class B (waved) EN ISO 354

### Airflow

465 Pa s/m EN 29053

### Flame resistance

AS/NZS 1530.3

AS/NZS 3837 class 2

ASTM E84 Class A Unadhered

ASTM E84 Class A Adhered

BS 5852 crib 5 with treatment \*

BS 5852 part 1

EN 1021-1/2

IMO FTP Code 2010 Part 8

NF D 60 013

NFPA 260

UNI 9175 1IM

US Cal. Bull. 117-2013

Free from added flame retardant chemicals as standard

*\* To pass this test flame retardant treatment is necessary. We are looking into more environmentally friendly alternatives but for now, the external finisher may use a treatment containing halogen-based flame retardants*

## **ACT Guidelines Woven fabrics**

### **Flammability**

US Cal. Bull. 117-2013

### **Dry & Wet Crocking**

Dry Crocking: Grade 4.5

Wet Crocking: Grade 4.5

### **Colour Fastness to Light**

Grade 4.5 minimum 40 hours

### **Physical properties**

Pilling Class 4-5

Breaking Strength warp 196 / weft 138 lbs.

Seam Slippage warp 107.5 / weft 52 lbs.

### **Abrasion**

100.000 cycles Martindale – High Traffic / Public Spaces

### **Benefits of wool**

Wool is a renewable resource

Wool is very comfortable because of its ability to absorb/  
give off humidity

Wool is flame retardant

Wool is biodegradable

Wool is naturally soil resistant

Wool ages with grace

### **Quality benefits**

Complies with Möbelfakta

Very good abrasion

Very good lightfastness

Flame retardant

### **Environmental benefits**

EU Ecolabel compliant

No content of PFCs or 'PFAS'

REACH compliant

Californian Proposition 65 list compliant

LBC Red list compliant

Healthier Hospitals compliant

### **Green building certificates**

Greenguard Gold: Low chemical emission

Environmental Product Declaration (EPD): 3rd Party Verified.

ISO 14025 & EN 15804. Developed in accordance with the  
European standard EN 15804+A2.

Health Product Declaration (HPD): Declaring textile content  
and substance

### **Country of origin**

United Kingdom

### **Launch**

2017

### **Warranty**

10 years. See terms and conditions on kvadrat.dk

Kvadrat packaging and cardboard is recyclable. Cardboard  
material is FSC certified and / or contains recycled content.

For further information

kvadrat.dk

Repeat size cm (approx.)

Colour	Vertical	Horizontal
115	1 cm	1 cm
125	1 cm	1 cm
145	0 cm	1 cm
165	1 cm	1 cm
445	1 cm	1 cm
565	1 cm	0 cm
625	1 cm	0 cm
645	1 cm	1 cm
725	1 cm	2 cm
745	2 cm	2 cm
765	1 cm	0 cm
775	9.5 cm	9 cm
785	2 cm	2 cm
845	1 cm	1 cm
875	1 cm	1 cm
965	1 cm	0 cm
985	1 cm	1 cm

Repeat size " (approx..)

Colour	Vertical	Horizontal
115	0.4"	0.4"
125	0.4"	0.4"
145	0	0.4"
165	0.4"	0.4"
445	0.4"	0.4"
565	0.4"	0
625	0.4"	0
645	0.4"	0.4"
725	0.4"	0.8"
745	0.8"	0.8"
765	0.4"	0
775	3.75	3.5
785	0.8"	0.8"
845	0.4"	0.4"
875	0.4"	0.4"
965	0.4"	0
985	0.4"	0.4"