



Revive 1


**kvadrat**



754




834




944



774



974



764




184



534




144



524



194




154



664

Revive 1

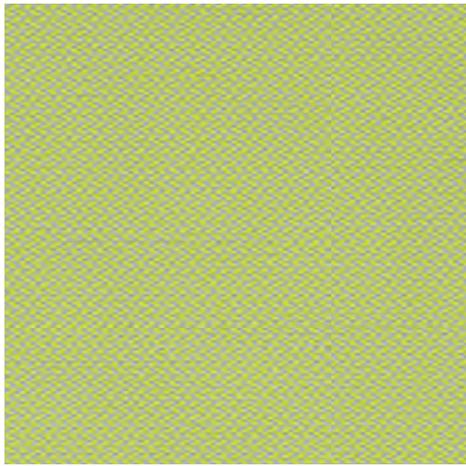

914



424




224



324



434




414



454



274



164




634



284



384

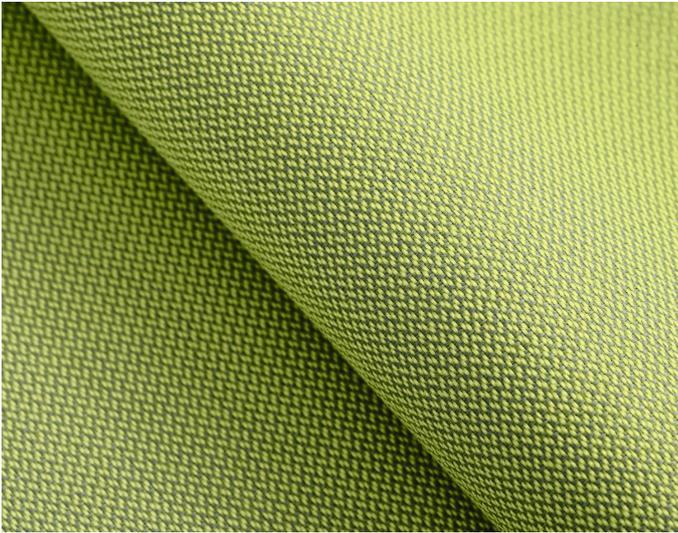

## Revive 1

Design: Georgina Wright

Type: Upholstery, panel fabric

*In accordance with California Bill AB 2998 and similar legislation within the United States, this product may not be used as upholstery. It can be used for vertical applications.*

Composition: 100% recycled polyester FR

Yarn type: Filament

Binding: Dobby

Width: Approx. 140 cm, 55 inches

Weight: Approx. 420 g/lin.m, 13.6 oz/ly

Colour difference may occur

Cleaning: Vacuum clean frequently, ideally every week if fixed covers. Remove stains as soon as they occur, with clean warm water or sparkling water. Extraction clean when necessary. Extraction cleaning might dissolve water-based glue. Pay attention to temperature and amount of cleaning fluid.

Also washable at 60-80°C, half wash load. Drip drying.

Mount in moist condition. Shrinkage app. 2% at 60°C.

Be aware of increased shrinking and creasing the higher the temperature.

Disinfection, see kvadrat.dk

More info: Care and maintenance kvadrat.dk



10 year warranty



## Revive 1

### Abrasion

Approx. 60.000 Martindale rubs, EN ISO 12947

*Abrasion test results exceeding ACT performance guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention*

### Pilling

Note 4-5, EN ISO 12945

### Seam slippage

Seam parallel to warp: 3.5 mm parallel to weft: 4 mm  
EN ISO 13 936-2 180 Newton

### Lightfastness

Note 5-7 ISO 105-B02

### Fastness to rubbing

Dry note 5 ISO 105-X12

Wet note 4-5 ISO 105-X12

### Absorption

0.55/Class D (flat), 0.80/Class B (waved) EN ISO 354

### Airflow

597 Pa s/m EN 29053

### Flame resistance

AS/NZS 3837 class 1

ASTM E84 Class A Unadhered

ASTM E84 Class B Adhered

BS 5852 crib 5 with treatment \*

BS 5852 ignition source 3

BS 5852 part 1 with treatment \*

DIN 4102 B1

EN 1021-1/2

IMO FTP Code 2010 Part 8

NFPA 701

ÖNORM B1/Q1

SN 198 898 5.3 with treatment \*

UNI 9175 1IM

UNI 9177 Classe 1

US Cal. Bull. 117-2013

*\* To pass this test flame retardant treatment is necessary.*

*We are looking into more environmentally friendly alternatives but for now, the external finisher may use a treatment containing halogen-based flame retardants*

# kvadrat

## **ACT Guidelines Woven fabrics**

### **Flammability**

US Cal. Bull. 117-2013

### **Dry & Wet Crocking**

Dry Crocking: Grade 5.0

Wet Crocking: Grade 5.0

### **Colour Fastness to Light**

Grade 5.0 minimum 40 hours

### **Physical properties**

Pilling Class 4-5

Breaking Strength warp 323 / weft 191 lbs.

Seam Slippage warp 91.5 / weft 93.5 lbs.

### **Abrasion**

60.000 cycles Martindale – High Traffic / Public Spaces

### **Quality benefits**

Complies with Möbelfakta

Very good abrasion

Good lightfastness

Permanent flame retardant

Washable

### **Environmental benefits**

Recycled content

Free of intentionally added PFAS

Mono-material designed for circularity

Follow the EU Ecolabel dye restrictions incl. AZO dye and heavy metal restrictions

No use of halogen-based flame retardants (incl. brominated and chlorinated)

REACH compliant

Californian Proposition 65 list compliant

LBC Red list compliant

### **Green building certificates**

Greenguard Gold: Low chemical emission

Health Product Declaration (HPD): Declaring textile content and substance

### **Country of origin**

China

### **Launch**

2014

### **Warranty**

10 years. See terms and conditions on [kvadrat.dk](http://kvadrat.dk)

Kvadrat packaging and cardboard is recyclable. Cardboard material is FSC certified and / or contains recycled content.

For further information

[kvadrat.dk](http://kvadrat.dk)