


Sone

kvadrat

Sone

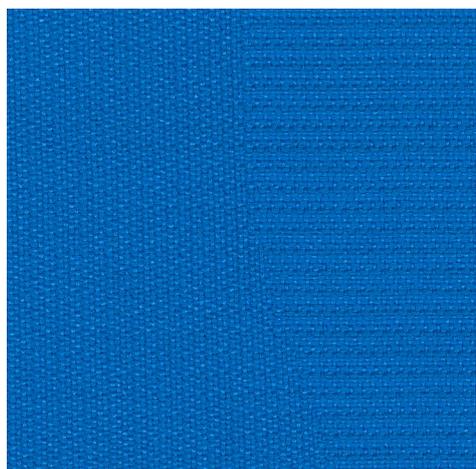

757



767



957



797




947




977



567



117




927



517



547



137



457



397



197



177



Sone

Abrasion

Approx. 40.000 Martindale rubs, EN ISO 12947

Abrasion test results exceeding ACT performance guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention

Pilling

Note 4-5, EN ISO 12945

Seam slippage

Seam parallel to warp: 3.5 mm parallel to weft: 2.0 mm
EN ISO 13 936-2 180 Newton

Lightfastness

Note 5-7 ISO 105-B02

Fastness to rubbing

Dry note 4-5 ISO 105-X12
Wet note 4-5 ISO 105-X12

Flame resistance

AS/NZS 3837 Class 1
ASTM E84 Class A Adhered
ASTM E84 Class A Unadhered
BS 5852 Crib 5 with treatment *
BS 5852 Part 1 with treatment *
BS 7176 Low Hazard
EN 1021-1/2
IMO FTP Code 2010 Part 8
SN 198 898 5.2 with treatment *
US Cal. Bull. 117-2013

** To pass this test flame retardant treatment is necessary. We are looking into more environmentally friendly alternatives but for now the external finisher may use a treatment containing halogen based flame retardants.*

Sone

Design: Erwan & Ronan Bouroullec

Type: Upholstery, panel fabric

Composition: 100% post-consumer recycled polyester

Yarn type: Filament

Binding: Jacquard

Width: Approx. 140 cm, 55 inches

Weight: Approx. 570 g/lin.m, 18 oz/ly

Repeat: Approx. V. 49 cm, 19 inches, H. 49 cm, 19 inches

Colour difference may occur

Cleaning: Vacuum clean frequently, ideally every week if fixed covers. Remove stains as soon as they occur, with clean warm water or sparkling water. Extraction clean when necessary. Extraction cleaning might dissolve water based glue. Pay attention to temperature and amount of cleaning fluid.

Also washable at 60-80°C, half wash load. Drip drying. Mount in moist condition. Shrinkage app. 2% at 60°C. Be aware of increased shrinking and creasing the higher the temperature. Disinfection, see kvadrat.dk

More info: Care and maintenance kvadrat.dk



10 year warranty



kvadrat

ACT Guidelines Woven fabrics

Flammability

US Cal. Bull. 117-2013

Dry & Wet Crocking AATCC 8

Dry Crocking: Grade 4.5

Wet Crocking: Grade 4.5

Colour Fastness to Light AATCC 16

Grade 4.0 minimum 40 hours

Physical properties

Pilling Class 4-5 ASTM D4970

Breaking Strength warp 329 / weft 343 lbs, ASTM D5034

Seam Slippage warp 108.5 / weft 129 lbs, ASTM D4034

Abrasion ASTM D4966

40.000 cycles Martindale – High Traffic / Public Spaces

Quality benefits

Complies with Möbelfakta

Good lightfastness

Flame retardant

Washable

Environmental benefits

Complies with EU Ecolabel

Recycled content

No use of halogen-based flame retardants (incl. brominated and chlorinated)

Free of intentionally added PFAS

Mono-material designed for circularity

REACH compliant

Californian Proposition 65 list compliant

LBC Red list compliant

Healthier Hospitals compliant

Green building certificates

Greenguard Gold: Low chemical emission

Environmental Product Declaration (EPD): Based on a LCA following EN 15804 and follow the standard of ISO 14040

Health Product Declaration (HPD): Declaring textile content and substance

Country of origin

Holland/Netherlands

Launch

2023

Warranty

10 years. See terms and conditions on kvadrat.dk

Kvadrat packaging and cardboard is recyclable. Cardboard material is FSC certified and / or contains recycled content.

For further information

kvadrat.dk