



VANIR


KVADRAT / RAF SIMONS




733




883




693




773




243



133




293




473

VANIR

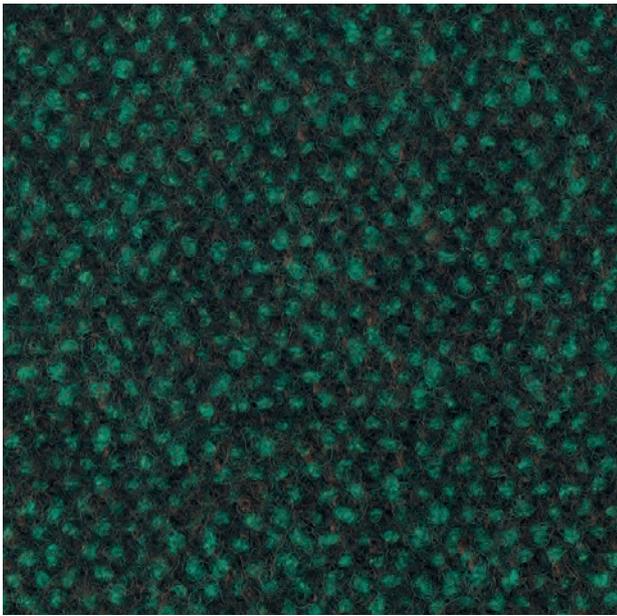


983



913



943



393



413




443



363



113



193



373

## KVADRAT/RAF SIMONS



### VANIR

Design: Raf Simons

Type: Upholstery

Composition: 92% new wool, 8% nylon

Yarn type: Woollen

Binding: Dobby

Width: Approx. 140 cm, 55 inches

Weight: Approx. 760 g/lin.m, 24.4 oz/ly

Repeat: None

Cleaning: Vacuum clean frequently, ideally every week.

Remove stains as soon as they occur, with clean warm water or sparkling water. Extraction clean when necessary.

Extraction cleaning might dissolve water-based glue. Pay attention to temperature and amount of cleaning fluid.

Disinfection, see kvadrat.dk

More info: Care and maintenance kvadrat.dk



10 year warranty



### Abrasion

Approx. 100.000 Martindale rubs, EN ISO 12947

### Pilling

Note 3-4, EN ISO 12945

### Seam slippage

Seam parallel to warp: 3.0 mm parallel to weft: 3.0 mm  
EN ISO 13 936-2 180 Newton

### Lightfastness

Note 6-7 ISO 105-B02

### Fastness to rubbing

Dry note 4-5 ISO 105-X12

Wet note 4-5 ISO 105-X12

#### Flame resistance

AS/NZS 3837 class 2  
ASTM E84 Class A Unadhered  
ASTM E84 Class B Adhered  
BS 5852 Crib 5 with treatment\*  
BS 5852 part 1  
EN 1021-1/2  
IMO FTP Code 2010 part 8  
NF D 60 013  
SN 198 898 5.3 with treatment\*  
UNI 9175 1IM  
US Cal. Bull. 117-2013  
ÖNORM B1/Q1

Free from added flame-retardant chemicals as standard

\* To pass this test flame retardant treatment is necessary.  
We are looking into more environmentally friendly alternatives  
but for now, the external finisher may use a treatment containing halogen-based flame retardants

#### ACT Guidelines Woven fabrics

##### Flammability

US Cal. Bull. 117-2013

##### Dry & Wet Crocking

Dry Crocking: Grade 4.5

Wet Crocking: Grade 4.5

##### Colour Fastness to Light

Grade 4.5 minimum 40 hours

##### Physical properties

Pilling Class 3-4

Breaking Strength warp 151 / weft 122 lbs.

Seam Slippage warp 140 / weft 129 lbs.

##### Abrasion

100.000 cycles Martindale - High Traffic / Public Spaces

##### Benefits of wool

Wool is a renewable resource

Wool is very comfortable because of its ability to absorb/  
give off humidity

Wool is flame retardant

Wool is biodegradable

Wool is naturally soil resistant

Wool ages with grace

##### Quality benefits

Complies with Möblfakta

Very good abrasion

Very good lightfastness

Flame retardant

#### Environmental benefits

Complies with EU Ecolabel

Free of intentionally added PFAS

REACH compliant

Californian Proposition 65 list compliant

LBC Red list compliant

Healthier Hospitals compliant

#### Green building certificates

Greenguard Gold: Low chemical emission

Health Product Declaration (HPD): Declaring textile content  
and substance

#### Country of origin

United Kingdom

#### Warranty

10 years. See terms and conditions on kvadrat.dk

Kvadrat packaging and cardboard is recyclable.

Cardboard material is FSC certified and / or contains  
recycled content.

For further information

kvadrat.dk