

VIDAR 4


KVADRAT / RAF SIMONS




693



582




542




556




653



622



633




526




222




1880



106



146



152



182



333



323



363



133



143




353




386

VIDAR 4

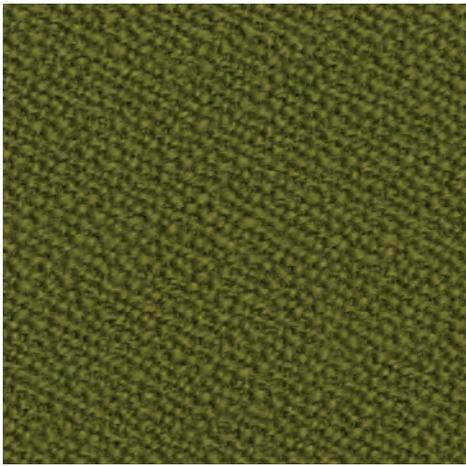

956



786



554



772




733




932



972



743



676



943



1062



872



656



913




1511



123



472



456





443



723

KVADRAT/RAF SIMONS

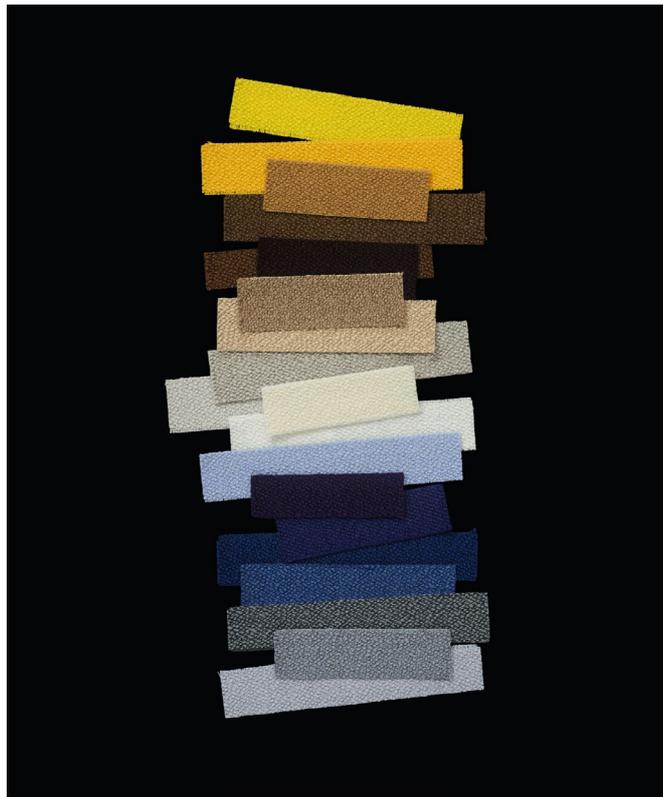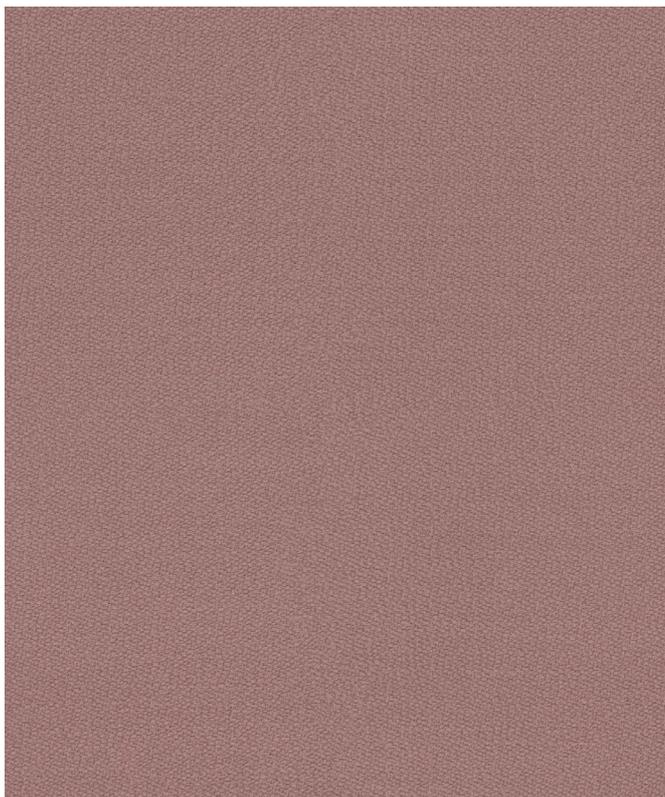

VIDAR 4

Design: Raf Simons

Type: Upholstery

Composition: 94% new wool, 6% nylon

Yarn type: Woollen

Binding: Crepe weave

Width: Approx. 140 cm, 55 inches

Weight: Approx. 770 g/lin.m, 24.7 oz/ly

Repeat: None

Colour difference may occur

Foreign fibers may occur in light colours

Cleaning: Vacuum clean frequently, ideally every week.

Remove stains as soon as they occur, with clean warm water or sparkling water. Extraction clean when necessary.

Extraction cleaning might dissolve water-based glue. Pay attention to temperature and amount of cleaning fluid.

Disinfection, see kvadrat.dk

More info: Care and maintenance kvadrat.dk



10 year warranty



Abrasion

Approx. 100.000 Martindale rubs, EN ISO 12947

Abrasion test results exceeding ACT performance guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention

Pilling

Note 4, EN ISO 12945

Seam slippage

Seam parallel to warp: 5.5 mm parallel to weft: 7.0 mm
EN ISO 13 936-2 180 Newton

Lightfastness

Note 5-7 ISO 105-B02

Fastness to rubbing

Dry note 3-5 ISO 105-X12

Wet note 3-5 ISO 105-X12

Absorption

0.55/Class D (flat) EN ISO 354

Airflow

367 Pa s/m EN 29053

Flame resistance

AS/NZS 1530.3
AS/NZS 3837 class 2
BS 5852 crib 5 with treatment *
BS 5852 part 1
EN 1021-1/2
IMO FTP Code 2010 Part 7 with treatment *
IMO FTP Code 2010 Part 8
NF D 60 013
NFPA 260
NFPA 701 with treatment *
SN 198 898 5.3 with treatment *
UNI 9175 1IM
US Cal. Bull. 117-2013

Free from added flame-retardant chemicals as standard

** To pass this test flame retardant treatment is necessary.*

We are looking into more environmentally friendly alternatives but for now, the external finisher may use a treatment containing halogen-based flame retardants

ACT Guidelines Woven fabrics

Flammability

US Cal. Bull. 117-2013

Dry & Wet Crocking

Dry Crocking: Grade 4.5

Wet Crocking: Grade 4.0

Colour Fastness to Light

Grade 5.0 minimum 40 hours

Physical properties

Pilling Class 4

Breaking Strength warp 154 / weft 204 lbs.

Seam Slippage warp 101 / weft 82.5 lbs.

Abrasion

100.000 cycles Martindale - High Traffic / Public Spaces

Benefits of wool

Wool is a renewable resource

Wool is very comfortable because of its ability to absorb/
give off humidity

Wool is flame retardant

Wool is biodegradable

Wool is naturally soil resistant

Wool ages with grace

Quality benefits

Complies with Möbelfakta

Very good abrasion

Good lightfastness

Flame retardant

Environmental benefits

EU Ecolabel compliant

No content of PFCs or 'PFAS'

REACH compliant

Californian Proposition 65 list compliant

LBC Red list compliant

Healthier Hospitals compliant

Green building certificates

Greenguard Gold: Low chemical emission

Health Product Declaration (HPD): Declaring textile content
and substance

Country of origin

Norway

Warranty

10 years. See terms and conditions on kvadrat.dk

Kvadrat packaging and cardboard is recyclable.

Cardboard material is FSC certified and / or contains
recycled content.

For further information

kvadrat.dk